

Bi-directional DC-DC Converter for Hybrid Electric and Fuel Cell Systems



PRODUCT OVERVIEW:

The Bi-Directional DC-DC series of converters utilizes advanced Digital Power Processing with a high frequency magnetic design. It has a broad band dynamic response that provides an efficient regulation of voltage and current. Both inputs and outputs have limit protections for voltage, current and power. The high frequency magnetic design is a proven technology that has superior performance, response, flexibility and reliability. High efficiency and power density.

It comes with extensive diagnostics via CAN-J1939 or RS232.

FEATURES:

- Input and output Voltage Range: 100-650V_{DC}
- Input Current: 200A continuous.
- Efficiency: 96% rated
- Ground voltage isolation detection and fault protection.
- Short Circuit, Over Current, Over/Under Voltage and Over Temperature protection.
- CAN command, control and diagnostics. Output voltage can be regulated via CAN/Analog command.
- Input and output voltages, currents, power and temperature reporting
- Parallelable with fault tolerance operation.
- Cascaded multi-phases Converter.




APPLICATIONS:

Hybrid Electric and Fuel Cell Vehicles and Renewable Energy Systems.


MODEL NUMBER:

BDC2 □ □ □ □ □ □



Signal Connector DEUTSCH DT15-12PA	
1	GND
2	PWR_ON (Opto, 10-30V)
3	12V_POS
4	12V_NEG
5	VOUT_ANALOG_CMD
6	ANALOG_RTN
7	#FAULT (active low OC)
8	CAN_H
9	CAN_L
10	RS232_RX
11	RS232_TX
12	#PROGRAM
Power Connector: ITT , Tyco (Option)	

Line regulation ($\pm 10\%$)	$\pm 2\%$
Load regulation	$\pm 2\%$
Ripple	$< \pm 1\% + 500$ mVp-p
Load transient (10-90%)	$< 5\%$ typical
Response time	250 ms typical
Turn-on rise time	Soft-start, 450 ms typical
Output protection	Overload and short circuit
Cooling	Liquid cooled $< 60^\circ\text{C}$, 12 Lpm
Operating temperature	-20°C to $+70^\circ\text{C}$
Load de-rating	2.5% $^\circ\text{C}$ from 60°C liquid
Storage temperature	-40°C to $+105^\circ\text{C}$
Efficiency	$> 96\%$
Isolation resistance	> 1 M Ω at 700Vdc
Weight (kg)	21 kg.

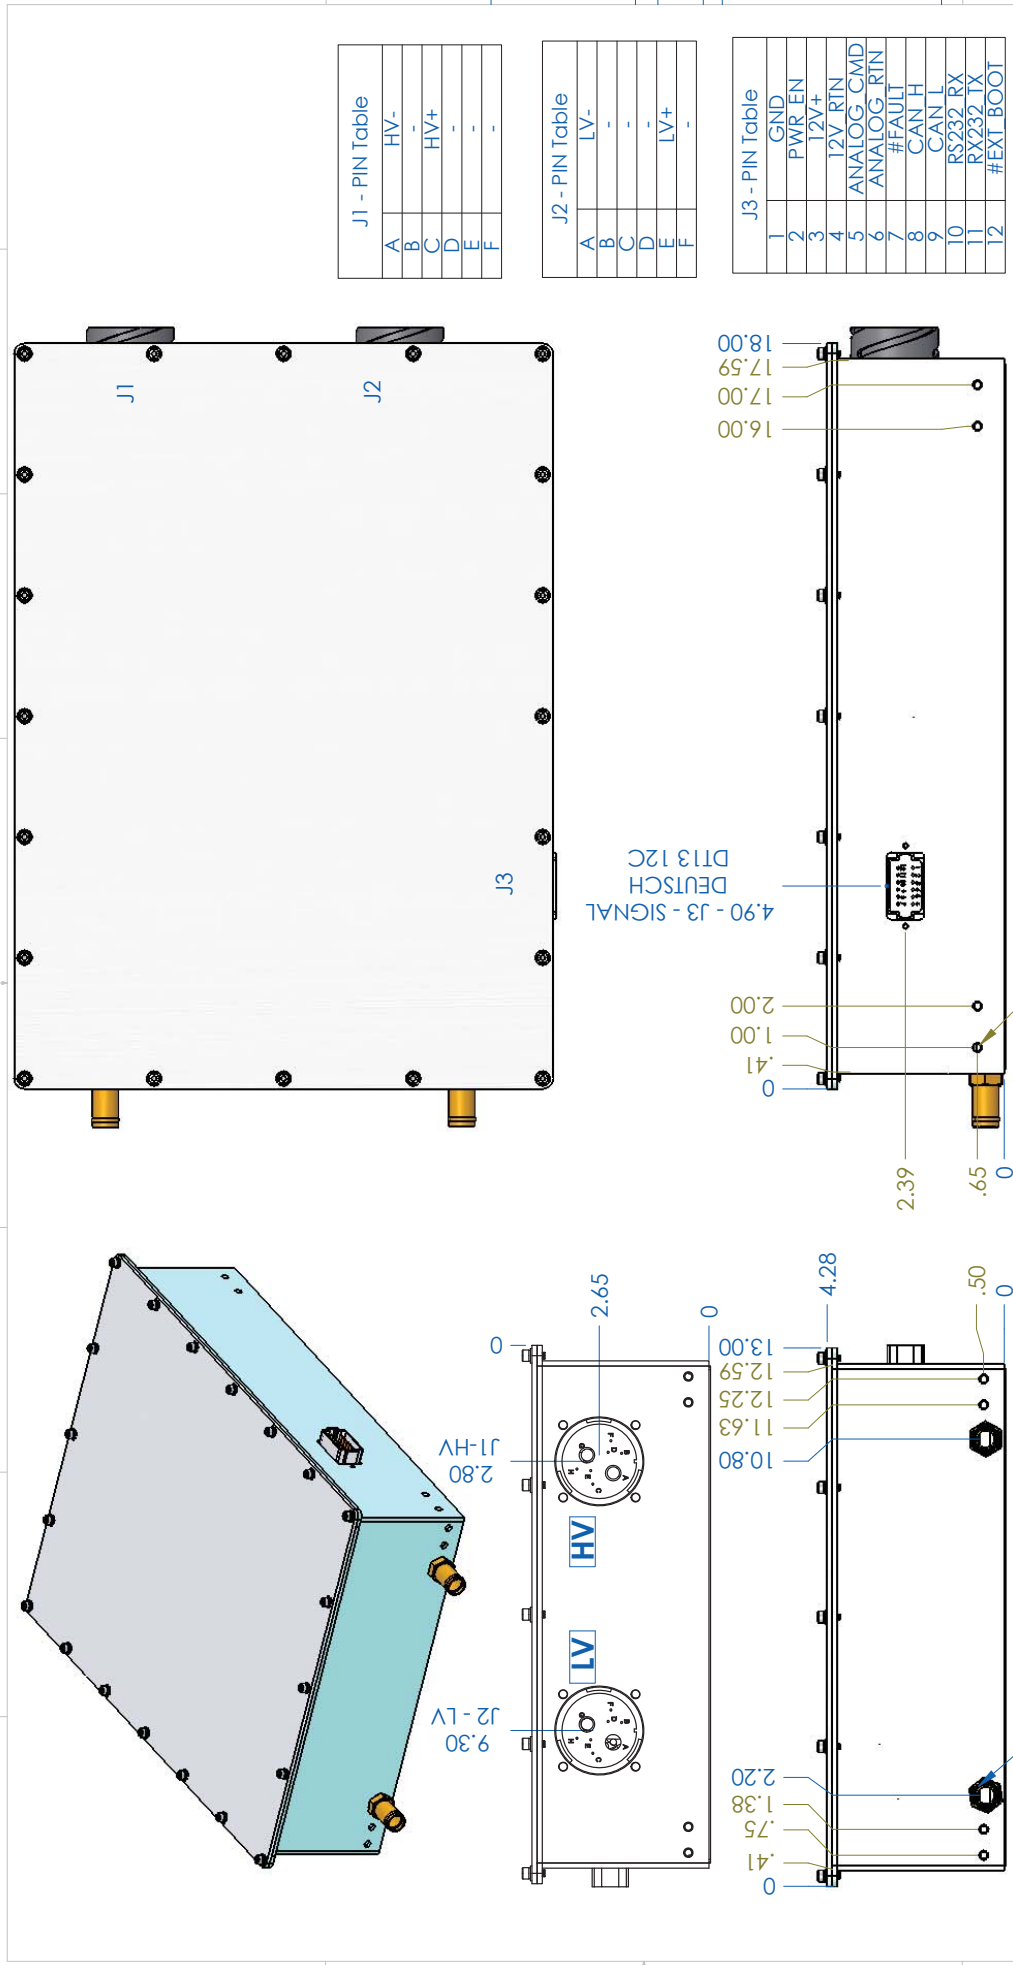

US HYBRID

BDC - 200
OUTLINE & MOUNTING

NAME: FERICKSON DATE: 02-15-10
 CHECKED: _____
 ENG APPR: _____
 MFG APPR: _____
 G.A. _____

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF US HYBRID. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF US HYBRID IS PROHIBITED.

SIZE: DWG. NO. **B** CV040000D-
 REV: -

SCALE: 1:3 SHEET 1 OF 1

NOTES: UNLESS OTHERWISE SPECIFIED

- BDC CONVERTER WEIGHT: 16.4 kg (36 LBS.).
- COOLANT: 50/50 ETHYLENE GLYCOL / WATER.
- MIN FLOW: 11.4l / MIN (3.0 GPM).
- PRESSURE DROP: 9.65 kPa (1.4 PSI) @ MINIMUM FLOW.
- PRESSURE DROP: 14.05 kPa (2.1 PSI) @ 40°C.
- INLET TEMP: -20°C TO 60°C.
- OPTIONAL 3/8 NPT HOSE FITTINGS: 3/4", 3/8" OR 90 DEG. FITTINGS.
- SIGNAL MATING CONNECTOR: DEUTSCH P/N# DT06-125C.